

ALL-TEST PRO® - FOR GREATLY INCREASED PRODUCTIVITY!



The ALL-SAFE PRO® is a permanently installed connection system that offers significant advantages over conventional monitoring and measuring of power and motor systems.

Manufactured in the USA and conforming to UL 61010-1:2012 Ed.3+R:29Apr2016 and UL 61010-2-030:2012 Ed.1 and is certified to CSA C22.2 #61010-1:2012 Ed.3 and CSA C22.2#61010-2-030:2012 Ed.1. It is CE certified for a rated input of 600V, measurement category III, pollution degree II, basic insulated electronic device. For motors generators over 600V it can be connected via potential transformers and current transformers.


The ALL-SAFE PRO® provides the signals necessary to determine the condition of the complete motor system with a minimum of risk, error and trouble. No need to suit up in bulky protection gear. Test set up is fast and the number of tests performed in a day is almost unlimited. The actual sampling takes about one minute. In addition, using the ALL-SAFE PRO® will eliminate connection errors. Installation is very easy, and no special tools are needed. Each installation can be completed in about one hour.

SAFE, EASY, & RELIABLE

There is no need to open the ALL-SAFE PRO® or the Control Panel door to gather data. The output pins are deactivated when not in use to prevent exposure to dangerous voltage. Voltages representing the flow of current are less than 2V on the exposed connector. Shorting of any of the contacts of the exposed connector will not result in damage or voltage exposure.

The ALL-SAFE PRO® is available for most applications and priced to guarantee a quick return on investment.



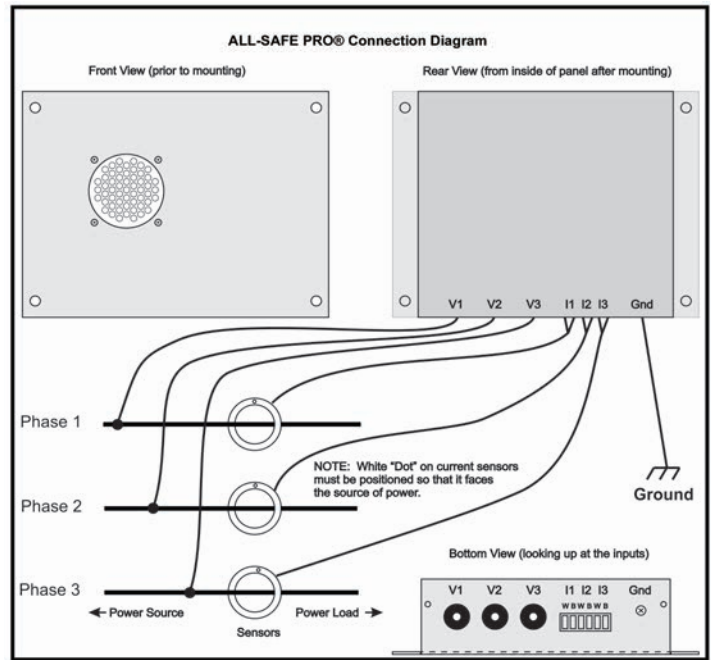

Technical Specifications

Size (Enclosure-excludes dimensions of connection port to ATPOL II)

6" Wide x 4 3/4" High x 1 5/8" Deep
(153mm x 120mm x 41mm)

Weight (Enclosure Only-No Sensors)

0.8 lbs. (0.4kg)

Operating Range

0 - 50 degrees C (32 - 122 degrees F)
Relative humidity to 70% (non-condensing)

Power Requirement

Nominal power is supplied by attached ATPOL

Input Voltage

Input Range: 1 - 600V steady-state (direct input)

Output Voltage

<5V when not connected to ALL-SAFE PRO®
Adapter

Accuracy: No distortion of the original voltage
when connected to ATPOL

Frequency Response: No de-rating of accuracy for
harmonics or transients

Input Current

Sensors convert to voltage <2V prior to entry
into ALL-SAFE PRO®
Current capacity dependent on current sensor
ordered

Output Current Measurement

Accuracy: accuracy of probe
Frequency Response: dependent on current
probe attached no de-rating of accuracy for
harmonics through 1500 Hz

Frequency

Range: 22 - 440 Hz fundamental frequency

Safety

CE certified for a 600V cat III, pollution degree II,
basic insulated electronic device.
Conforms to UL STD 61010-1:2004 UL
61010-1:2012 Ed.3+R:29Apr2016]
and UL 61010-2-030:2012 Ed.1 and is certified
to CAN/CSA C22.2 number 61010-1:2004 CSA
C22.2#61010-1:2012 Ed.3 and CSA
C22.2#61010-2-030:2012 Ed.1.

* These specifications are subject to
change without notice.

PRELIMINARY



ALL-TEST Pro, LLC

P.O Box 1139

Old Saybrook, CT 06475

Tel 860-399-4222

Fax 860-399-3180

Email info@alltestpro.com

Web www.alltestpro.com

Represented by: